


|  |                        |
|--|------------------------|
| Company Name                             |                        |
| Project Name                             |                        |
| Referance                                |                        |
| <b>Design Criteria</b>                   |                        |
| Medium                                   | Water/glycol (max.%50) |
| Max. Pressure                            | 10 barg                |
| Max. Temperature                         | 110°C                  |
| Design Standard                          | Factory standard       |
|  |                        |
|  |                        |
| <b>Testing and Quality Assurance</b>     |                        |
| Leakage test                             | yes art.4.3/SEP        |
| Test certificate                         | no                     |
| Design and manufacturing acc.2014/68/EC  | yes art.4.3/SEP        |
| Material certificates (structural parts) | no                     |
| Drawing                                  | no                     |
|  |                        |
| <b>Construction Materials</b>            |                        |
| Body                                     | Brass                  |
| Deaeration cap                           | Brass                  |
| Valve sealing                            | EPDM                   |
| Float                                    | PP                     |
|  |                        |
|  |                        |



**ViraTop**  
NRF nr. 8560905

**Technical Drawing**

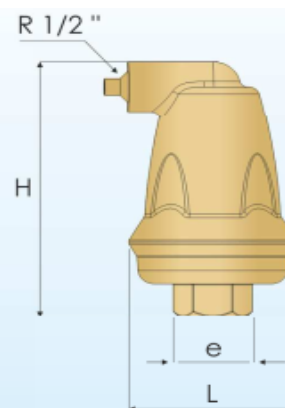

| TYPE | DN   | H   | h  | L    | R    | e    | Weights |  |
|------|------|-----|----|------|------|------|---------|--|
|      |      | mm  | mm | mm   | mm   | inch | kg      |  |
| ST   | 1/2" | 102 | -  | ø 59 | 1/2" | 1/2" | 0.54    |  |

Products produced before 19.07.2016 are according to 97/23/EC