
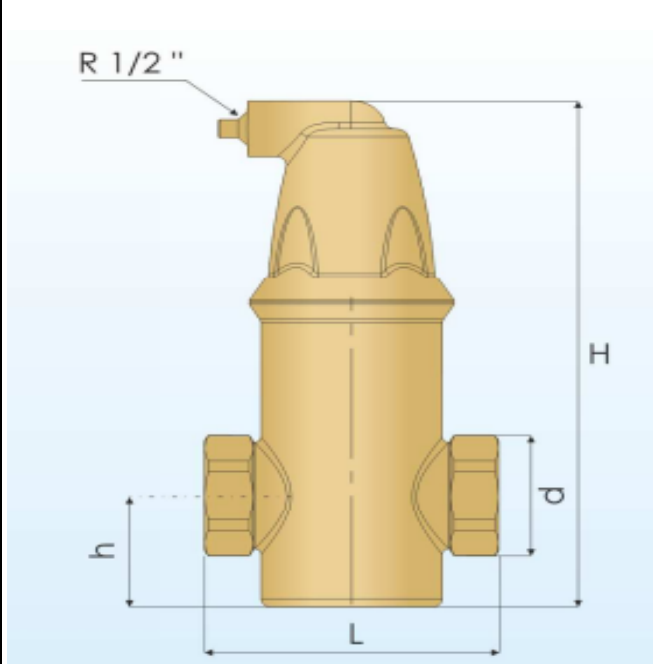


Company Name			
Project Name			
Reference			
<b>Design Criteria</b>			
Medium	Water/glycol (max.%50)		
Max. Flow velocity	1 m/s		
Max. Flow rate	2,1 l/s		
Max. Pressure	10 barg		
Max. Temperature	110°C		
Design Standard	Factory standard		
		<b>Technical Drawing</b>	
			
<b>Testing and Quality Assurance</b>			
Leakage test	yes		
Test certificate	no		
Design and manufacturing acc.2014/68/EC	yes art.4.3/SEP		
Material certificates (structural parts)	no		
Drawing	no		
<b>Construction Materials</b>			
Body	Brass		
Deaeration cap	Brass		
Valve sealing	EPDM		
Float	PP		
Internal mesh	316 Stainless Steel		
Solder	Soft		
		<b>Dimension</b>	
	DN	2"	
	H	188	mm
	h	46	mm
	L	99	mm
	R	1/2"	mm
	e	-	inch
	Weight	1,32	kg

Products produced before 19.07.2016 are according to 97/23/EC